




# Area 1: Outfall

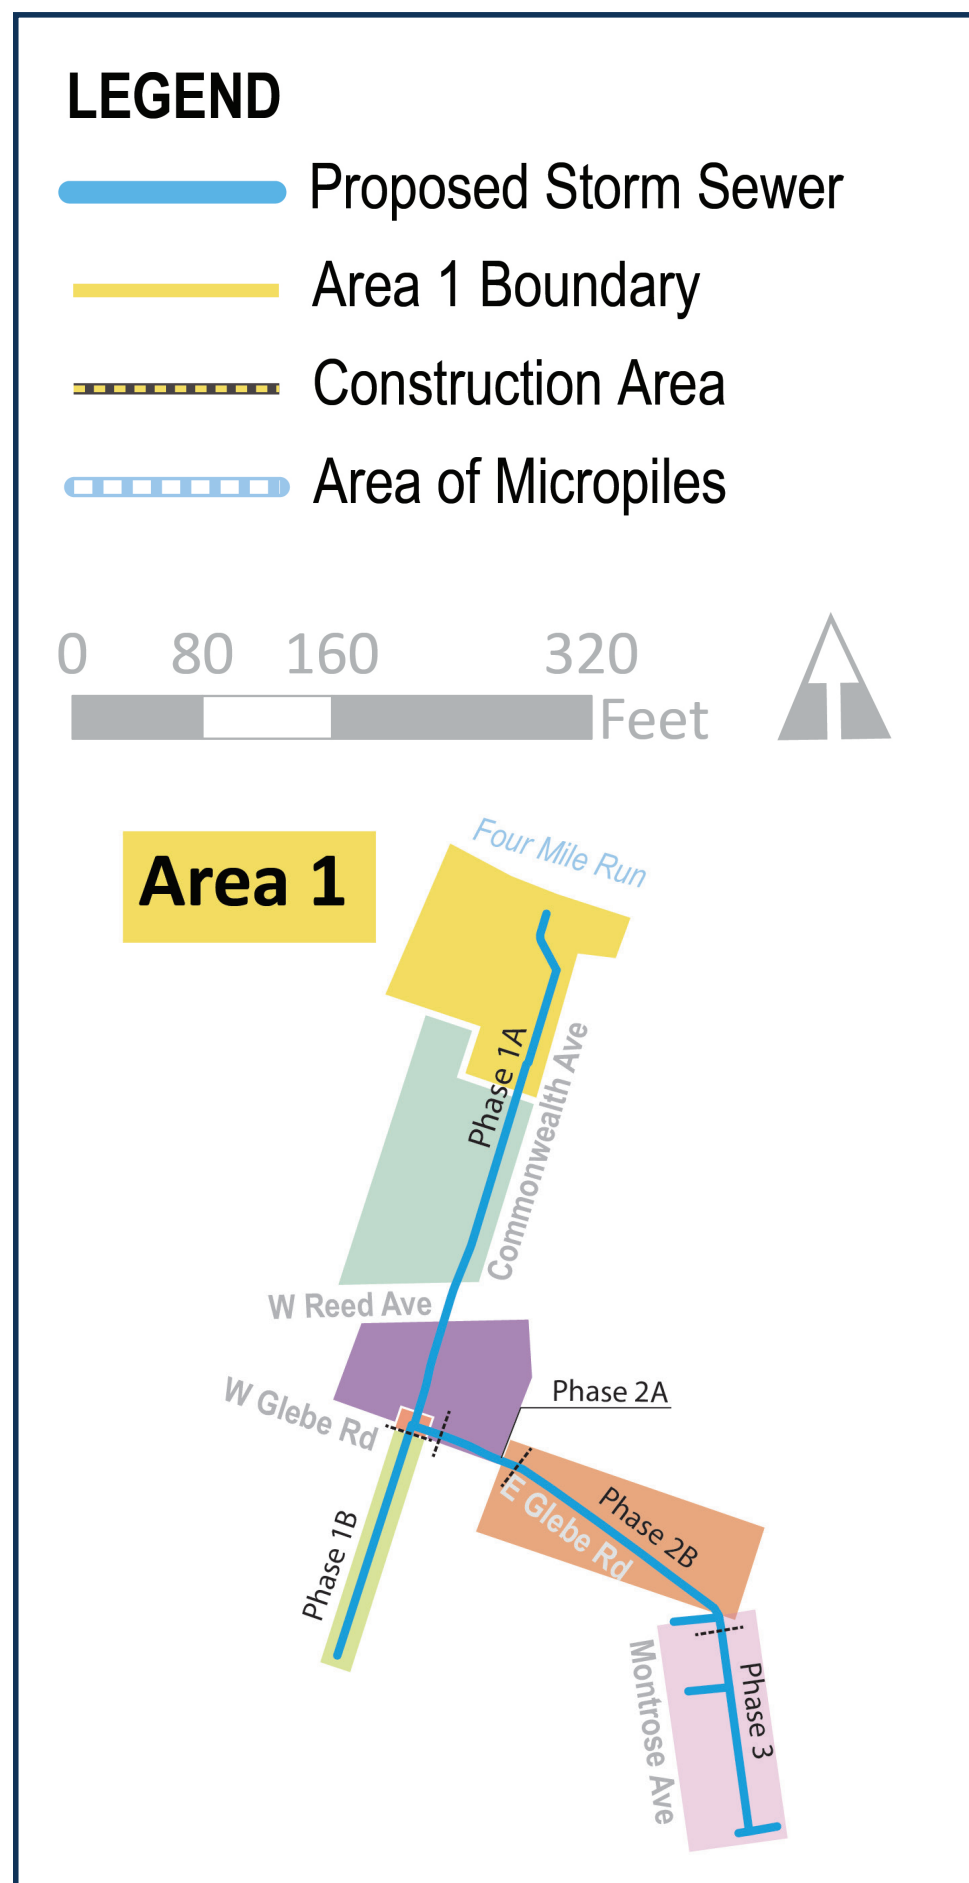

## Description of Work

- ▶ New outfall to Four Mile Run - 20' x 40' concrete structure to be installed along the bank of Four Mile Run
- ▶ Two 8' x 9' box culverts to be installed (largest in the project)
- ▶ Cul-de-sac to be replaced with a gravel road to allow for future upgrade of Four Mile Run Park
- ▶ Construction Technique: Micropiles to be used in soft soils will also reduce noise, vibration and dust


## Construction Impacts

- Bicyclists** – access to Four Mile Run trail will be diverted around the baseball field. Bicyclists on the road will continue to share the lane with vehicles
- Pedestrians** – sidewalk on west side of Commonwealth Ave will be open during construction
- Boaters** – access to boat ramp will be detoured around construction. Boat launch parking will be at Four Mile Run Park parking area; approximately 3 months
- Four Mile Run Park Ballfield** – will be closed for the duration of project construction; estimated to be 3 years



New culvert will be similar but double, not triple.

## Estimated Duration of Construction

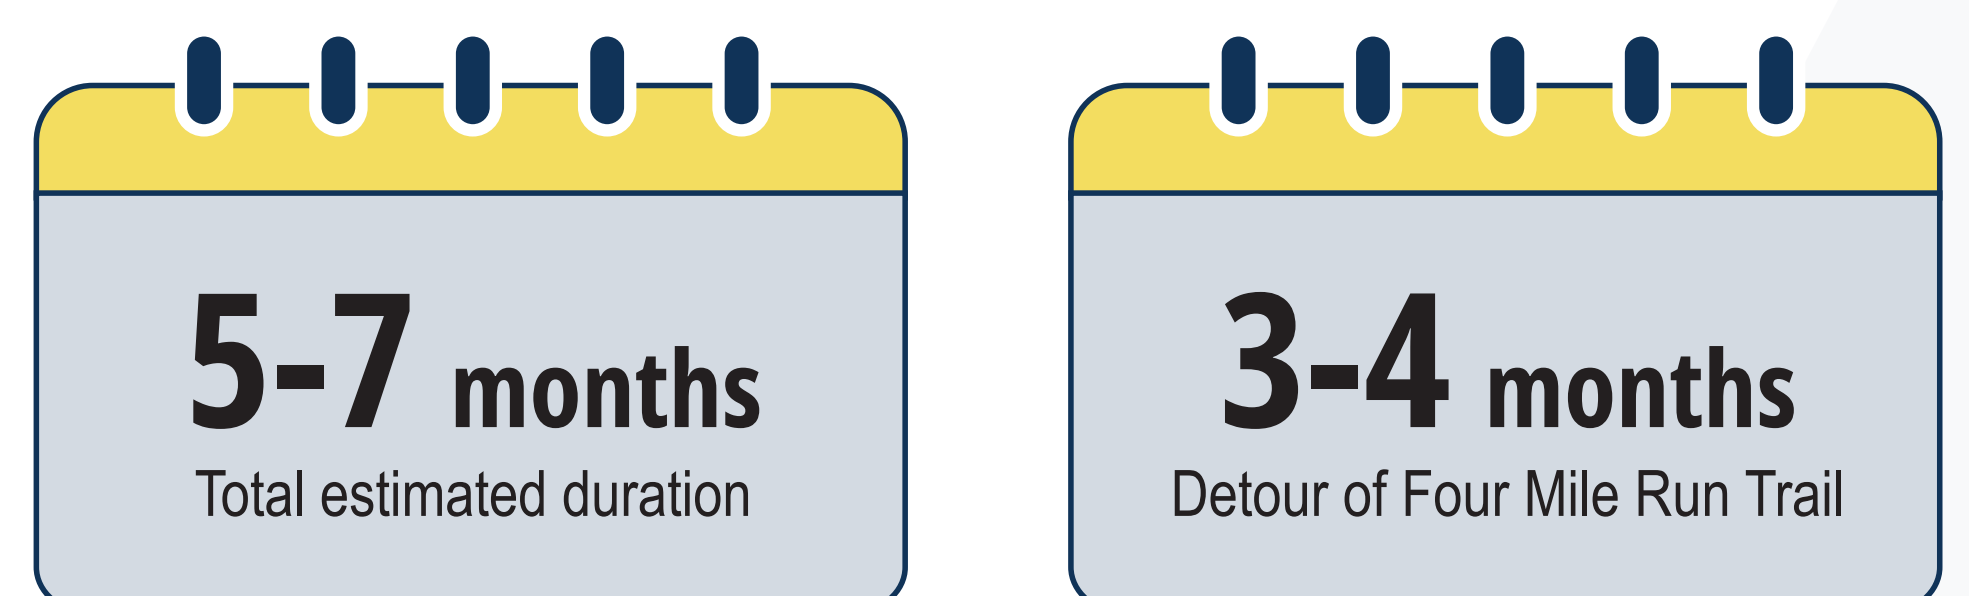

## Traffic Management During Construction

- ▶ Two-way traffic will remain on Commonwealth Avenue
- ▶ Bike traffic along Commonwealth Ave will continue to share-the-lane with vehicles; no change

