



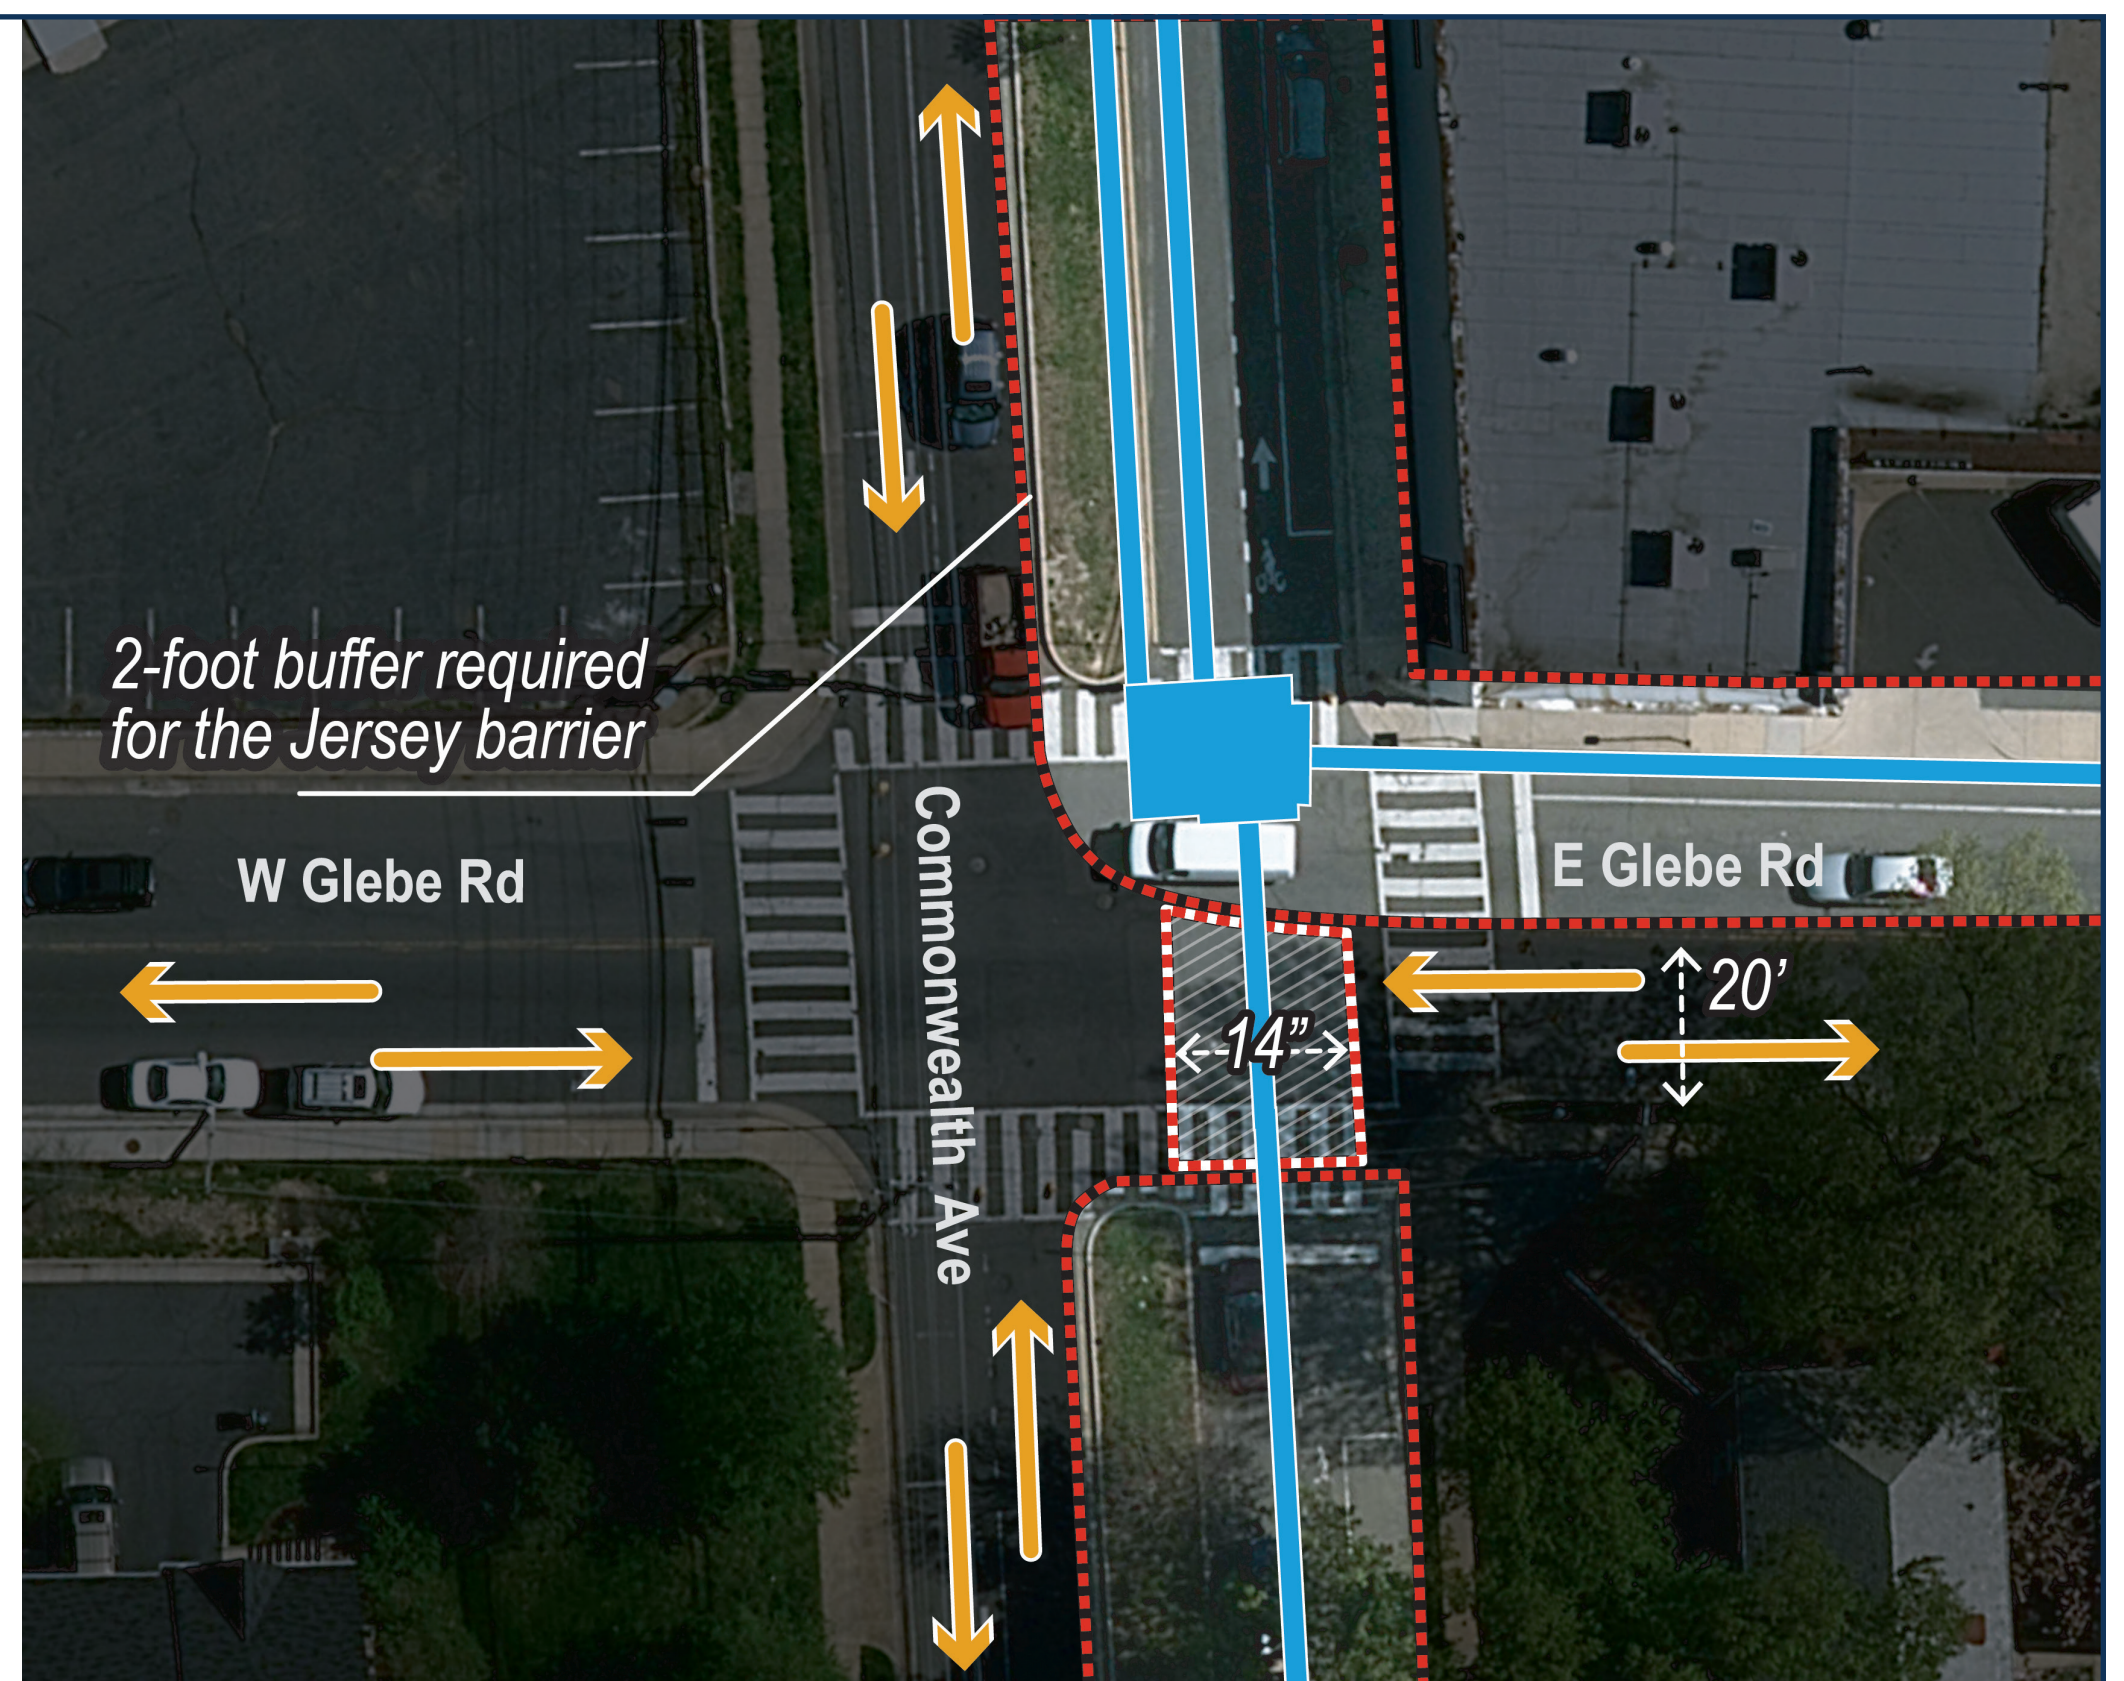


# Area 4: Intersection of Commonwealth Ave and Glebe Rd

## Description of Work


- ▶ **Junction box** - A large, cast-in-place concrete junction box on the northeast corner of the Commonwealth Ave/Glebe Rd intersection will capture stormwater from Glebe Rd and the southern part of Commonwealth Ave and direct it north to the outfall
- ▶ **Box culverts**
  - Double 8' x 7' box culverts on the north side of Commonwealth Ave
  - Single 8' x 7' box culvert on the south side of Commonwealth Ave
  - 7' x 7' box culvert on E Glebe Rd

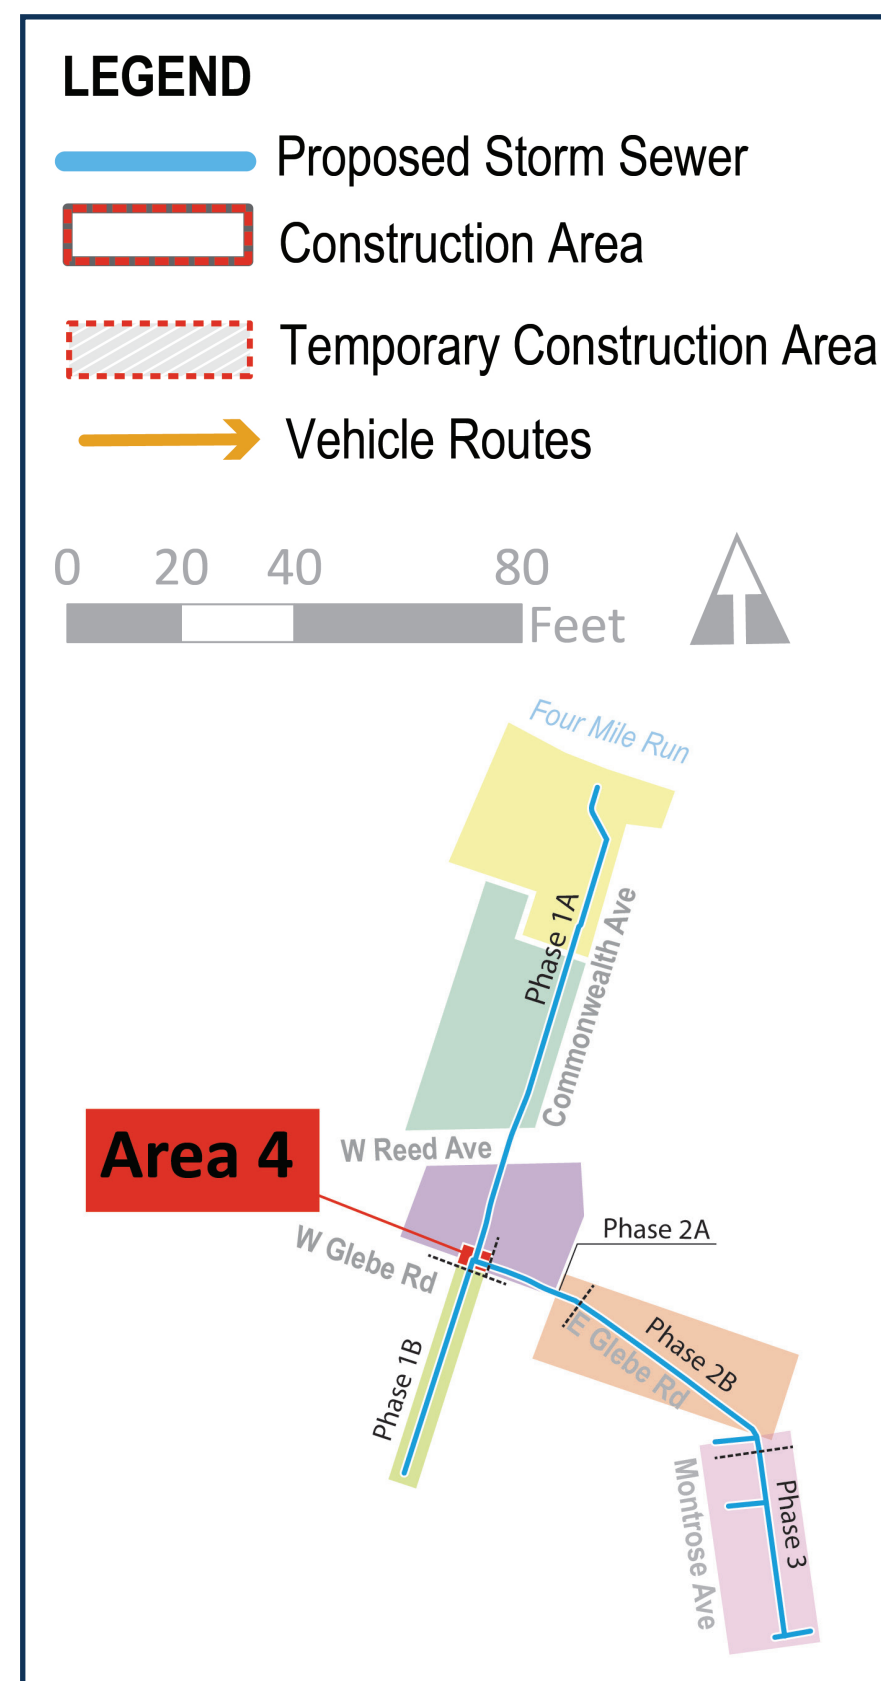


### Travel Lanes Now – Commonwealth Ave, facing north

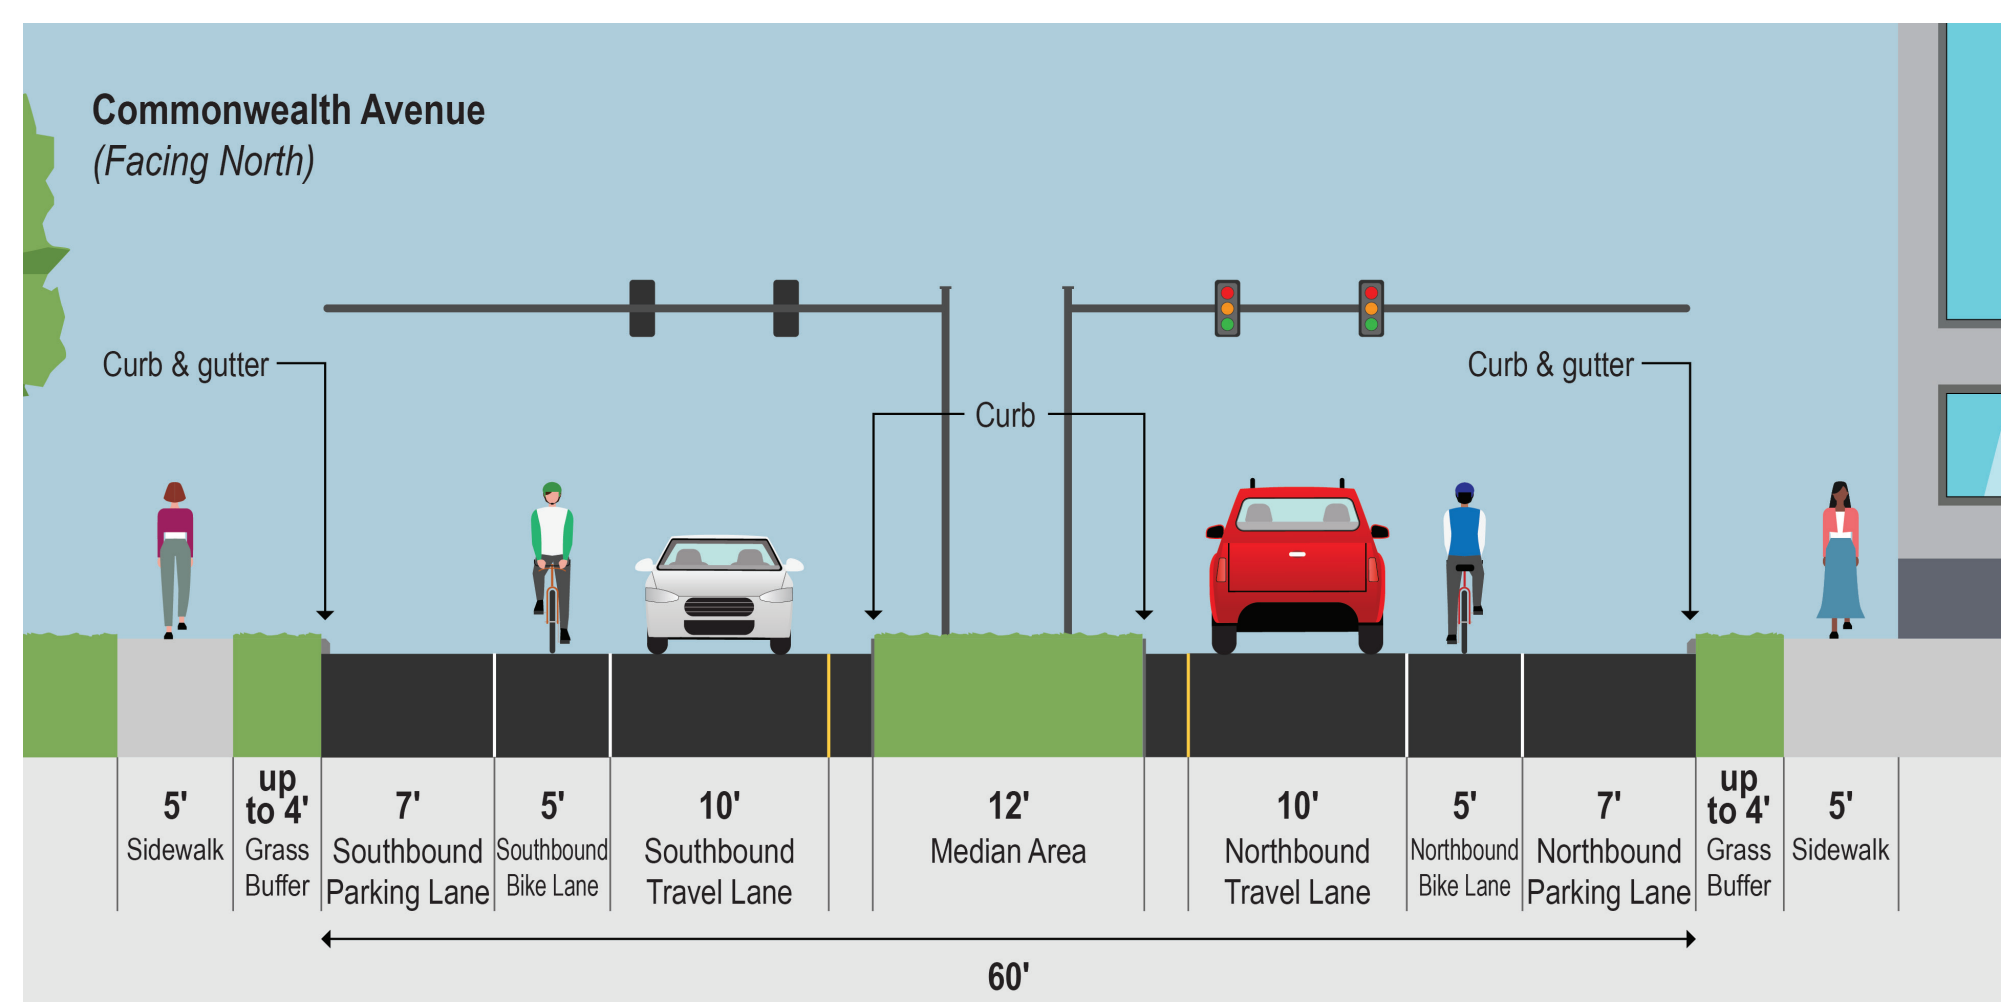


### Travel Lanes Now – W Glebe Rd, facing east

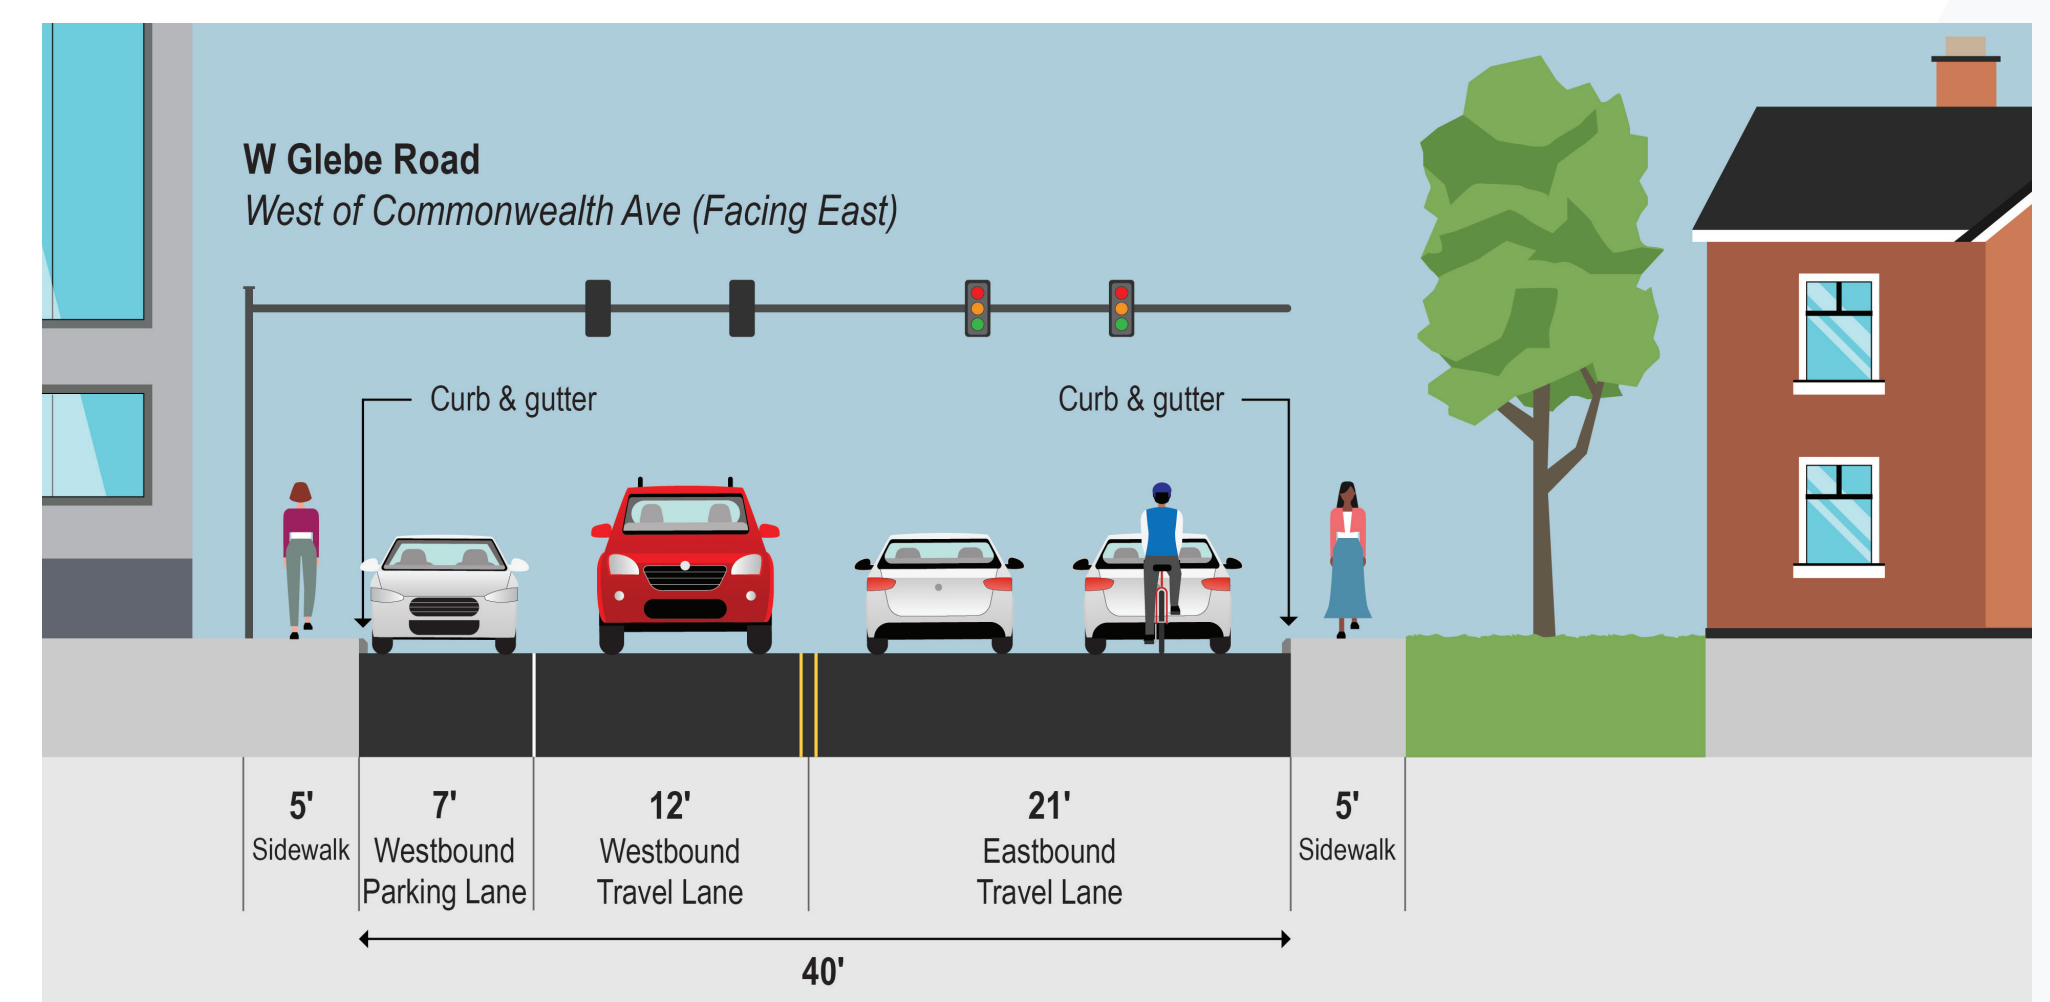

### Travel Lanes During Construction – Commonwealth Ave, facing north

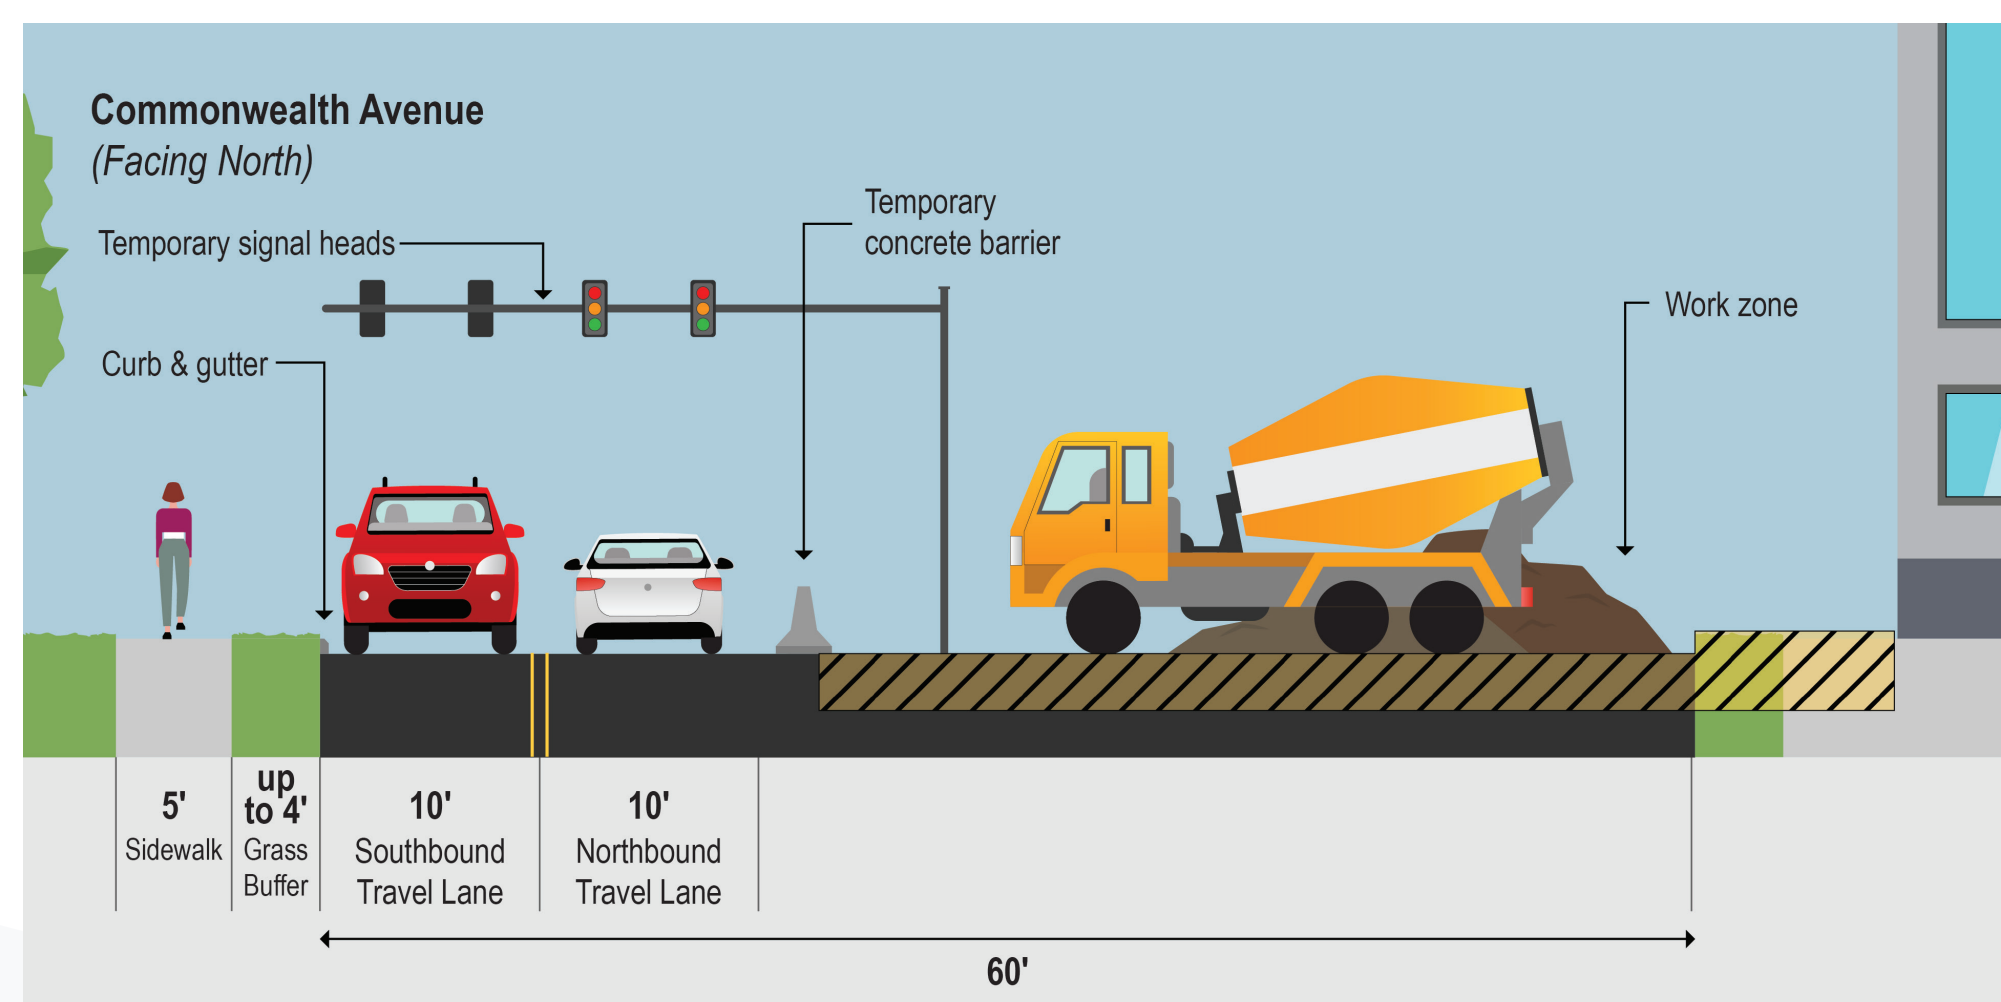

### Travel Lanes During Construction – W Glebe Rd, facing east

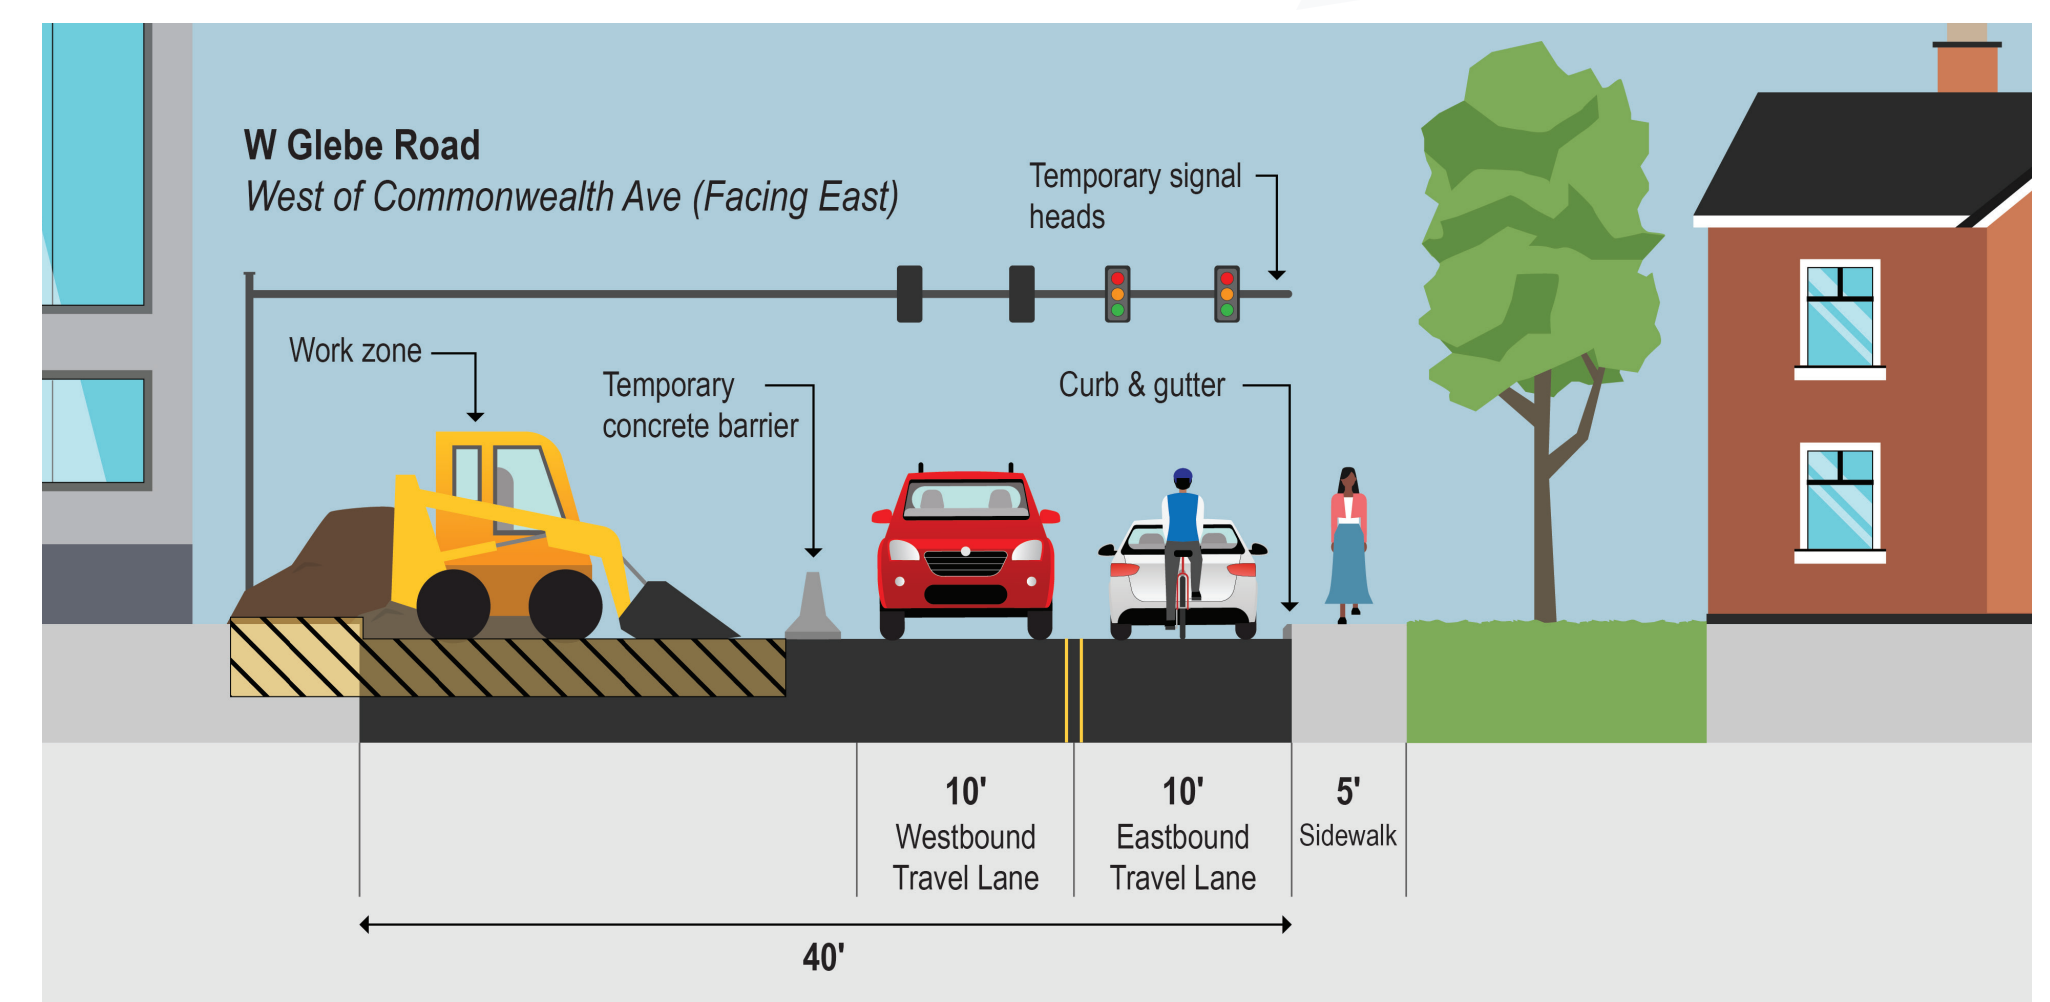

## Construction Impacts



### Vehicles

- ▶ Two-way traffic on Commonwealth Ave using the west side of the road; traffic signals will be shifted
- ▶ Two-way traffic on E Glebe Rd using the south side of the road; traffic signals will be shifted



### Parking

- ▶ No parking on both sides of Commonwealth Ave
- ▶ No parking on the south side of E Glebe Rd



### Pedestrians

- ▶ Sidewalk on the east side of Commonwealth Ave and the north side of E Glebe Rd will be closed
- ▶ Pedestrian crossing at the intersection will be re-routed to the west and south sides of the intersection



**Bicycles on Road** - bike lanes will be closed. Bicyclists will share the lane with vehicles

## Estimated Duration of Construction

